



Albany Standard Pumps

FF range of Corrosion Resistant Gear Pumps



Features

- Composite construction
- NYRIM housing, reinforced with stainless steel
- Excellent corrosion resistance
- Good abrasion resistance
- Light weight
- Simple design
- Cost effective
- Various options

Applications

- **Sugar Industry** – molasses, blackstrap, syrup, glucose
- **Paper Industry** – soap sulphate, fatty esters, tallow, tall oil
- **Agriculture** – farm effluent, liquid animal feeds
- **Mariculture** – fish oils, cod liver oil, halibut liver oil, fish proteins, sperm oil, soft wastes
- **Chemical Industry** – oils, polymers, acid
- **Many others** – flavours, fragrances, chocolate, cocoa butter, edible oils







Central Pump Supplies Ltd.
Unit 21, Primeside Park,
Kilshane Way,
Ballycoolin,
Dublin 15.

Ph: 01-8612326/27

Email: enquiries@centralpumpsupplies.com


www.centralpumpsupplies.com

Performance

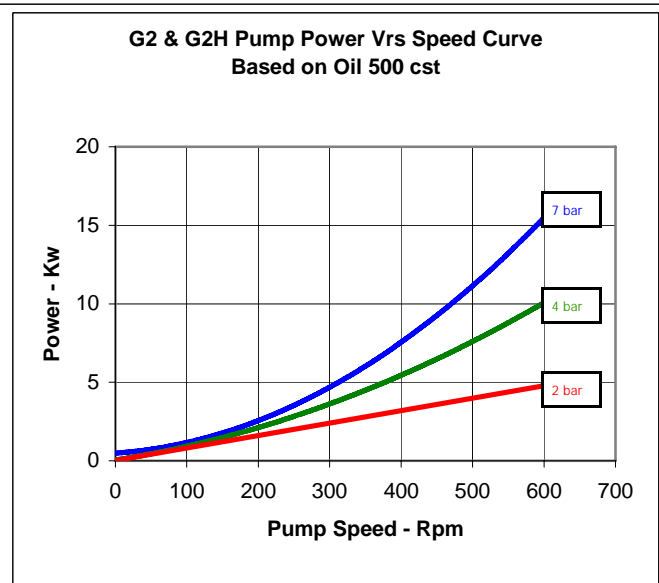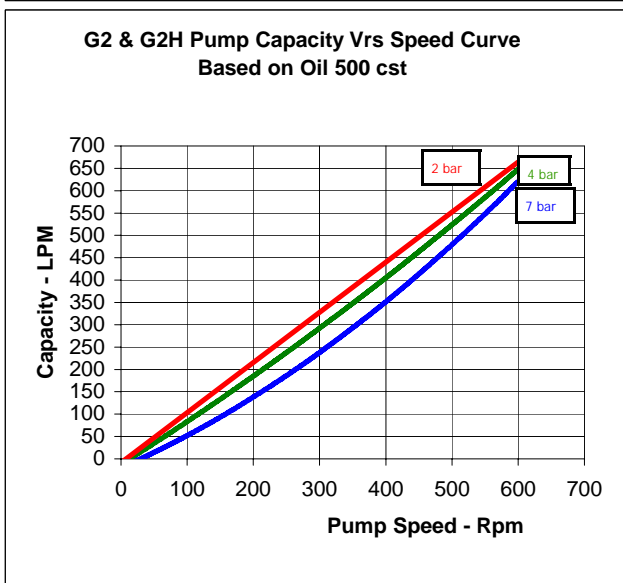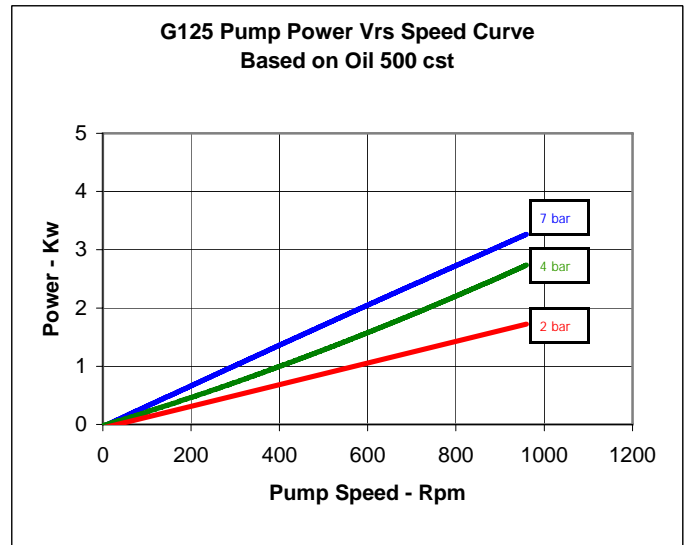
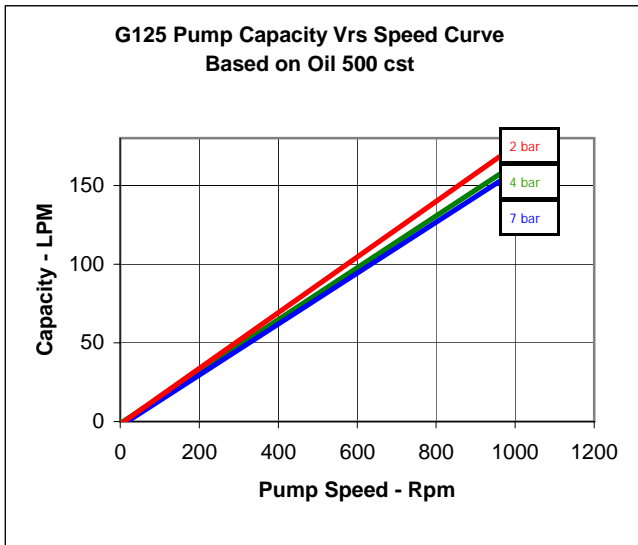


Specifications (standard materials of construction)

Model	G125	G2	G2H
Housing	Nyrim with inserts (316 stainless steel)	Nyrim	Nyrim with inserts (316 stainless steel)
Gears	Polyamide 12	Nyrim	Polyamide 12
Shafts	Stainless steel 316	Stainless steel 316	Stainless steel 316
Bearings	Bronze	Bronze & outboard ball bearing	Bronze
Seals	Lip Seal	Mechanical seal in Viton	Mechanical seal in Viton
Ports	1¼" BSPF	2" BSPF 2½" special order	2" BSPF – UK 2" NPT USA
Top Speed	0 – 950	0 – 300	0 – 650
Temp. range	-40 – +100°C	-40 – +100°C	-40 – +100°C


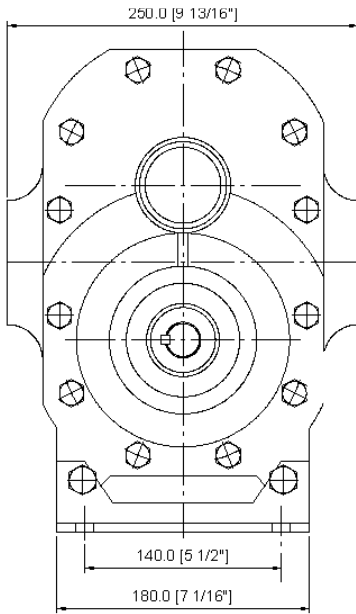


Model G2H

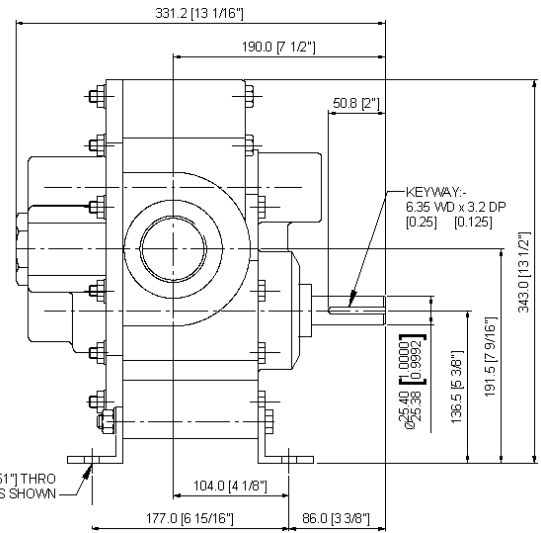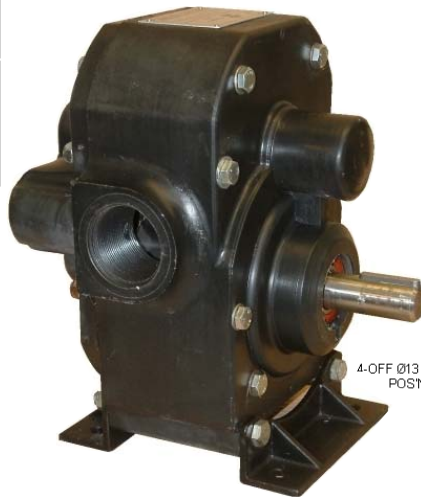

Shipping Weight 45 lbs – 21 kgs

Model G125

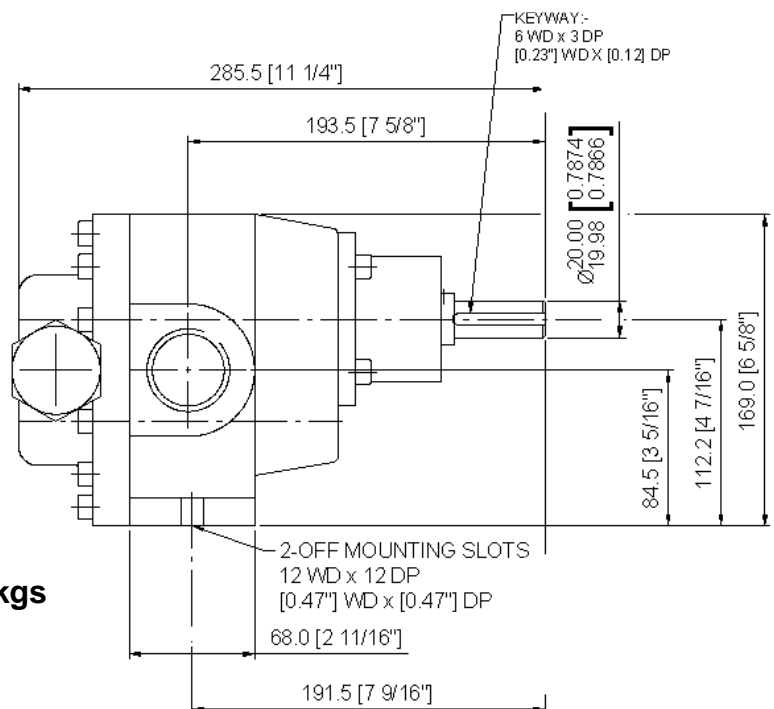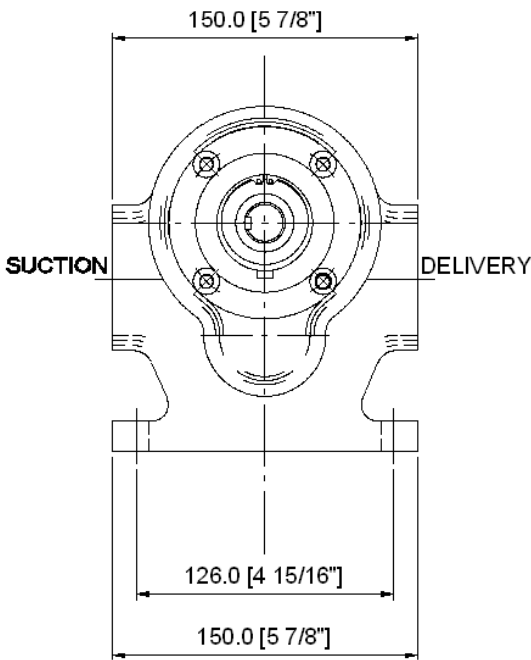

Shipping Weight 12lbs – 5.5kgs

Model DR3



We support Model DR3 with spares and we offer a repair service for installed pumps. Regretfully we cannot supply new pumps.

Design Options

Model G2H Carbon bearings
Various mechanical seal choices
Bronze, PTFE & Ertalyte gears

Model G125 Ertalyte bearings
Various mechanical seal materials
Choice of lip seal shaft sealing materials

OTHER CORROSION RESISTANT PUMPS FROM ALBANY

STANWIN – STAINLESS STEEL

Foot mounted and close coupled pumps for 5 to 25 litres/minute flows.
Please see our leaflet SS1 for details.

AP MODELS



A full range of stainless steel (316) bodied pumps for larger flows. Please see our leaflets R1 & R4 for capacity and power details.



Central Pump Supplies Ltd.
Unit 21, Primeside Park,
Kilshane Way,
Ballycoolin,
Dublin 15.

Ph: 01-8612326/27
Email: enquiries@centralpumpsupplies.com
www.centralpumpsupplies.com