

BTV300

300ltr Compact Slimline Water Storage Tank
c/w 3 Bar Submersible Pump



WRAS Approved Irish
Manufactured Materials

FEATURES

- 300lt Capacity
- Overall Dia. 560mm X Overall Height: 1600mm (to discharge of electronic controller)
- Weight of tank when empty (14kg + fittings + pump)
- MDPE Material is WRAS Approved
- Material is UV Stabilised (UV 8)
- 8" Screwed Lid
- 4 Flats located around the bottom of the tank for multiple connections (if required)
- All fittings are located to the front
- Constant pressure to outlets
- Quiet running Stainless Steel Acuarria 07-3MN 3 Bar Submersible pump
- WRAS approved rubber matting underneath the pump to help reduce vibrations from pump running
- 1 ¼" WRAS Approved Screened overflow connection
- ¾" Brass Ball valve c/w plastic float
- ¾" Drain at bottom of Tank BSP connection
- 1" internal copper pipework
- 1" Internal Europa Brass Spring check valve
- Internal 1" union for easy removal of the pump for servicing reasons
- Adjustable Electronic controller range of starting pressure from 1.5-2.2 Bar. Variable speed options available.
- 0-10 bar pressure gauge
- Dry running protection
- WRAS Approved screened tank breather
- Format 30 kit available




Unit 21,
Primeside Bus. Park
Kilshane Way
Ballycoolin
Dublin 15

BTV300

300ltr Compact Slimline Water Storage Tank

c/w 3 Bar Submersible Pump

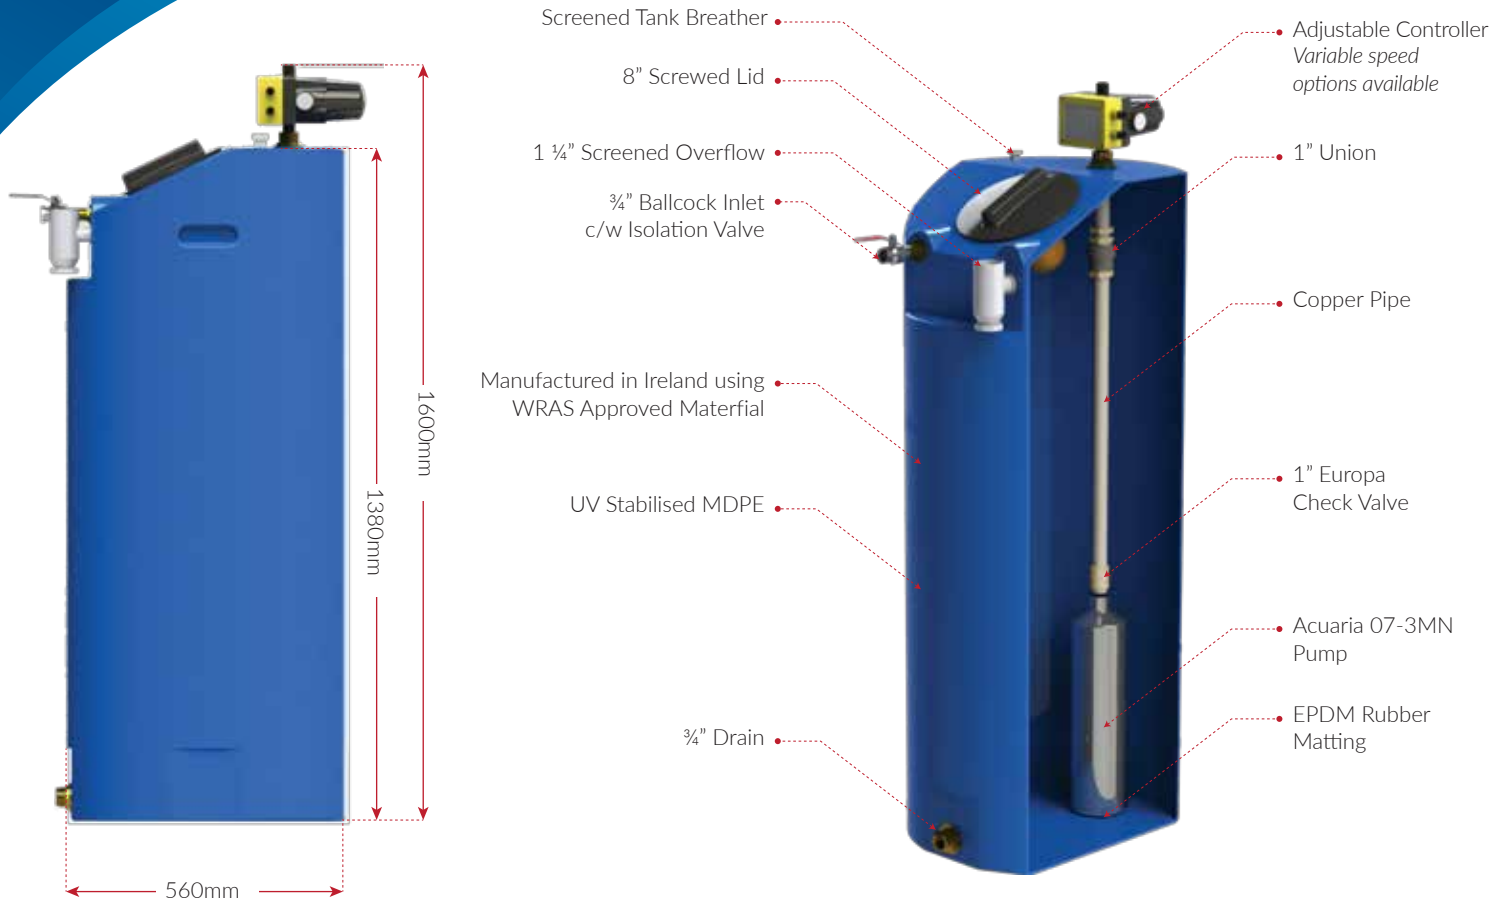

ADJUSTABLE CONTROLLER

Technical Features

Model	I [A]	Hz	Protection	Max. Pressure [kg/cm ²]	Starting Pressure [bar]	Differential Pressure [kg/cm ²]	Stopping Pressure	Ø Inlet connection	Ø Outlet connection
Pressdrive 05	12	50	IP54	10	1.5-2.5	1	Max. given by the pump	1"	1"

ACUARIA 07-3M PUMP

LARGER SIZES AVAILABLE ON REQUEST

Performance

230 V 50 Hz	400 V 50 Hz	A		P1 (kW)		kW	HP	µF	l/1'	10	20	30	40	45	50	60	65
		1~ 230 V	3~ 400 V	1~	3~												
Acuaría 07 3M	Acuaría 07 3	2.8	1.2	0.6	0.6	0.37	0.5	12	m ³ /h	33	29	26	21	18	15	8	4